




**Hutchison Hayes Separation Inc.**

## **HH 5500 5-speed**

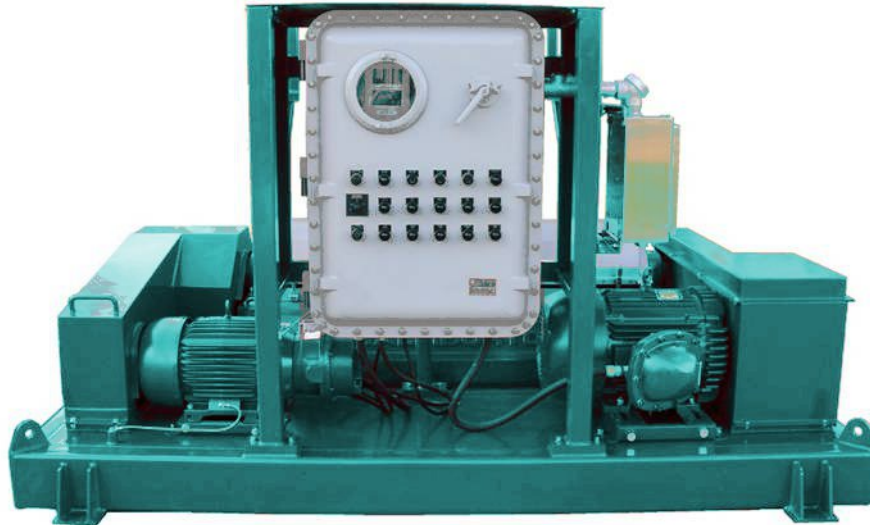

The HH 5500 5-speed is a configuration of a drive system for a Decanting centrifuge with variability options on the conveying speed. This configuration is a simple 5 speed selection of conveying speed. The Centrifuge bowl is driven by a main drive motor and the conveyor is driven through a planetary gear box by a 2-speed back-drive motor and brake assembly.

The conveyor speed is simply selected on the panel by a 5-position switch, the conveying speed can be changed while the decanter is in operation.

The gear box has a torque overload device on the driven sun-wheel shaft. The torque overload device is to protect both gearbox and conveyor against mechanical overload.

The HH 5500 5-speed can be delivered in different variants, explosion proof for hazardous areas, sanitary for Food applications or in a normal Nema 4 execution.


Main drive motor is setup with a sheave that allows simple selection of speeds, by moving the v-belt assembly.

Hutchison Hayes Separation Inc.  
3520 East Sam Houston Beltway N.  
Houston, Texas 77015, USA  
Phone 713 455 9600

[www.hutchisonhayes.com](http://www.hutchisonhayes.com)  
P.O.Box 2965  
Houston, Texas 77252, USA  
Fax 713 455 7753



# Hutchison Hayes Separation Inc.

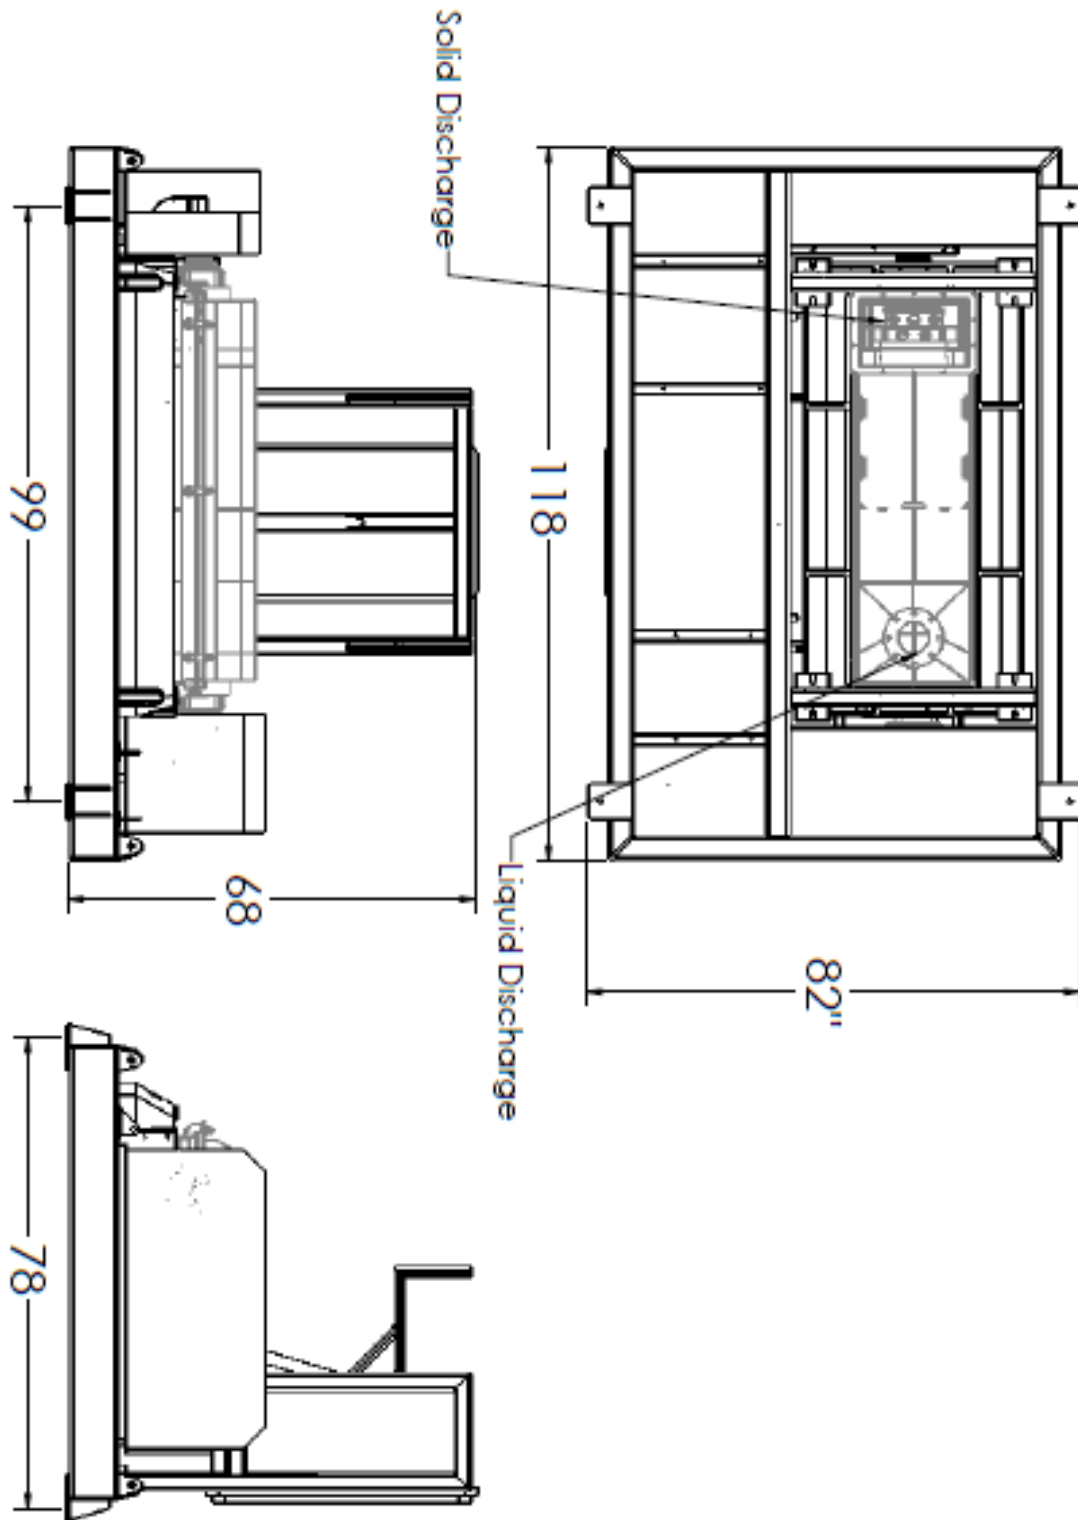

Hutchison Hayes Separation Inc.  
3520 East Sam Houston Beltway N.  
Houston, Texas 77015, USA  
Phone 713 455 9600

[www.hutchisonhayes.com](http://www.hutchisonhayes.com)  
P.O.Box 2965  
Houston, Texas 77252, USA  
Fax 713 455 7753